

# REVOLUTION

## CONVENTIONAL BATTERY CHARGERS

### Modular High Frequency Smart Chargers

The **REVOLUTION** Series is an innovative line of ultra-high frequency battery chargers that incorporates cutting-edge modular power design that delivers peak efficiency greater than 93% and efficiencies greater than 90% throughout the entire charge cycle. As the charge cycle progresses and the output current tapers down, the charger will turn off unneeded modules, allowing the remaining modules to operate at peak efficiency.

The **REVOLUTION** Series is a combination of cutting-edge charging and energy management technologies, with a smaller footprint, lower acquisition costs, easy maintenance, and flexible configurations, which makes updating your fleet of electric lift trucks a more attractive investment than ever before. Free your operation from spare batteries, daily battery changes, battery storage areas, and energy inefficient charging!

#### Unmatched energy savings

- › Highest charging efficiency throughout the entire charge cycle
- › Lowest energy costs related to battery charging
- › Latest generation MOSFET power conversion technology
- › CEC Compliant+
- › Minimize or even avoid peak demand cost related to battery charging

#### Innovative modular architecture

- › Multi-voltage 1.3kW power modules, that can be combined to produce over 30 kW output
- › Wireless Communication
- › "Plug and Play" utility makes expansion easy
- › No Downtime! Charger remains operational if a power module fails



**Total Charge Cycle  
Efficiency**  
> 90%

**Peak Efficiency**  
> 93%



#### Cost effective with long term savings

- › Low initial cost versus traditional fast chargers
- › Charger can be programmed for all battery types (lithium, flooded, low maintenance, gel, and sealed)
- › 24V through 80V battery capabilities, with maximum current remaining constant based on module voltage rating
- › With these unique design features, the **REVOLUTION** eliminates the need to replace chargers as your lift truck battery fleet changes in the future

## CONVENTIONAL HF CHARGER



### Variable Configuration Architecture


The **REVOLUTION** series of chargers are modular concept chargers offering multiple configuration capability. The independent power modules, installed in parallel, allow the user to add individual modules, increasing the charger's output for a minimal upgrade cost.

The parallel module design provides built-in redundancy that ensures that in the event of a module failure, the charger will continue to operate at a slightly lower current output, until the problematic module is replaced. In the event of a module failure, the module can quickly be replaced. The charger display will indicate the module failure and with the removal of a few screws, the faulted module can simply be unplugged and a new module plugged in, replace the door, re-energize the charger, and it is back to work. The unique modular architecture provides unmatched value, as diagnosis and repair of a **REVOLUTION** is the simplest and fastest of any charger in service today.

The **REVOLUTION** charger, when combined with the Viking Intel data logger, has the ability to be multi-voltage\*, allowing the charger to automatically charge a wide range of batteries and amp hour capacities, making the **REVOLUTION** the last charger you will need to purchase.

### REVOLUTION Series Features

- › Modular architecture that is scalable and reliable
- › Small footprint and light weight with wall, post, or rack mounting options
- › Viking Intel battery data logger option allows the **REVOLUTION** charger to have multi-voltage\*capabilities, giving the charger the ability to automatically adapt to the battery voltage and AH capacity
- › PowerCharge.NET monitoring system option allows you to collect and analyze fleet utilization information from a single location, optimizing your cost savings
- › The most efficient charger throughout the entire charge cycle

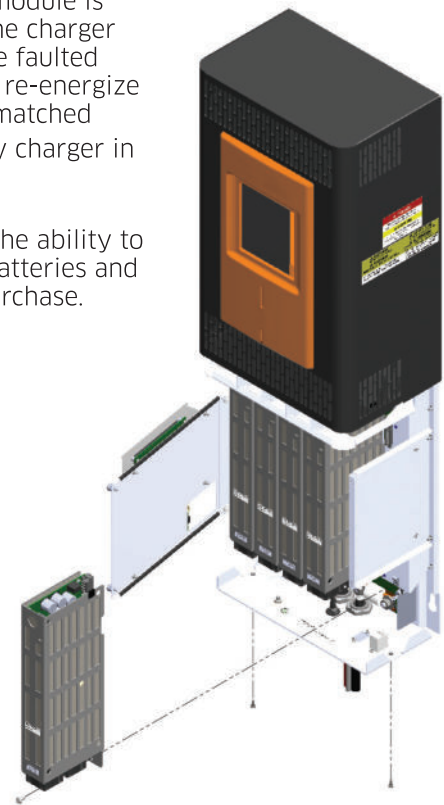

## REVOLUTION Conventional Charger Specifications

	Model	Size	Voltage	4kW	5kW	6kW	8kW	9kW	10kW
Maximum Current Output	5X	36	36V	90	120	150			
		48	36V/48V	75/67	100/90	125/112			
	8X	36	36V			150	180	210	240
		48	36V/48V			125/112	150/135	175/157	200/180
Number of Modules				3	4	5	6	7	8
Charger kW Rating				3.9	5.2	6.5	7.8	9.1	10.4
Input Current Draw				5.5	7.4	9.2	11.1	12.9	14.8
AC Breaker				5X: 15 A		8X: 20 A			
Max. Input Current Draw				5X: 10 A		8X: 15 A			
Input Voltage				480VAC, 3-phase ± 10%					
Efficiency				Total charge cycle efficiency > 90%					
				Peak charging efficiency > 93%					
User Interface				LCD/Keypad, Ethernet (optional)					
Cooling				Forced air (fans)					
Dimensions (WxDxH)				5X: 12.5." x 8.5" x 20.25"			8X: 18.5" x 9.5" x 21"		
Weight				5X: ≤ 56 lbs			8X: ≤ 81 lbs		
Certifications				UL and cUL listed: CEC Compliant*					

Based on 17% start rate